



1 |




B444 media

2 |




3 |

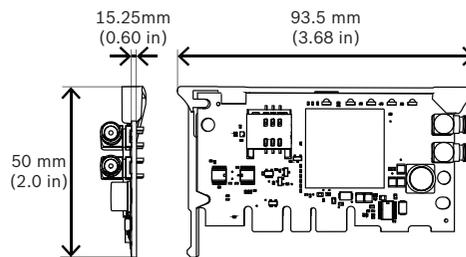

1:2


4 |




1:3

	Non-condensing	93% 0%	12v .....
	UL	49 °C } +120°F 0 °C } +32°F	Standby 35mA Maximum 85mA


5 |




6 |

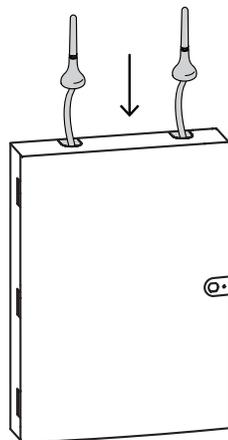


7 |

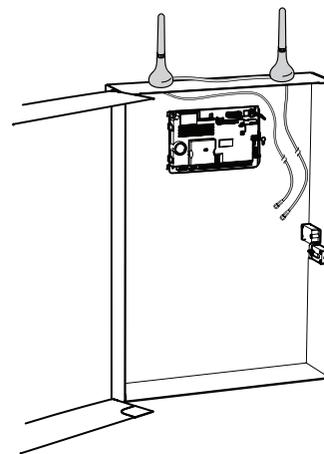

8 |

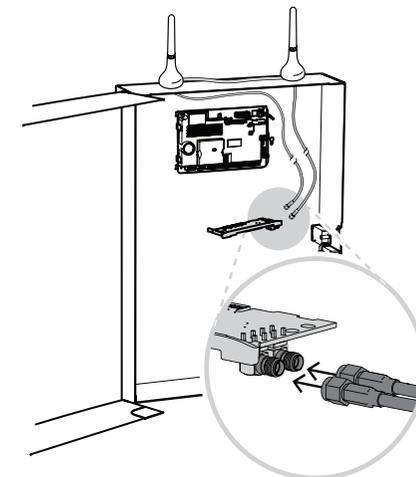


### CONETTIX Cellular Communicator B444-A2 | B444-V2






en Quick installation guide

**Bosch Security Systems B.V.**  
Torenallee 49  
5617 BA Eindhoven  
Netherlands  
**www.boschsecurity.com**  
© Bosch Security Systems B.V., 2022

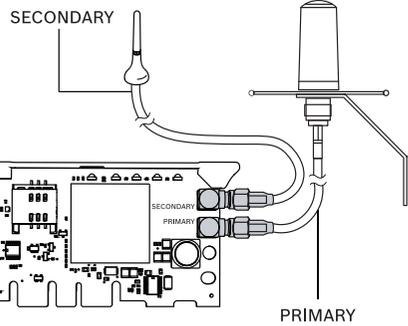

⚠ The B40 must be installed to the Primary connector.

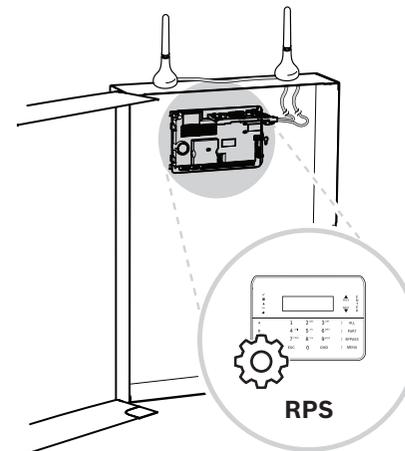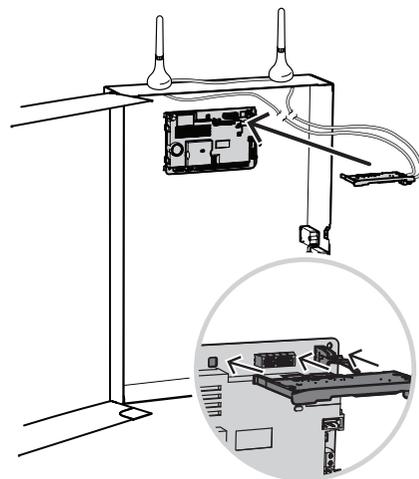

www.boschsecurity.com

#### Manufacturing dates

For product manufacturing dates, go to <http://www.boschsecurity.com/datecodes/> and refer to the serial number located on the product label.

#### Trademarks

All hardware and software product names used in this document are likely to be registered trademarks and must be treated accordingly.