




iCLASS 2K Wiegand Adhesive Tag (26-bit)

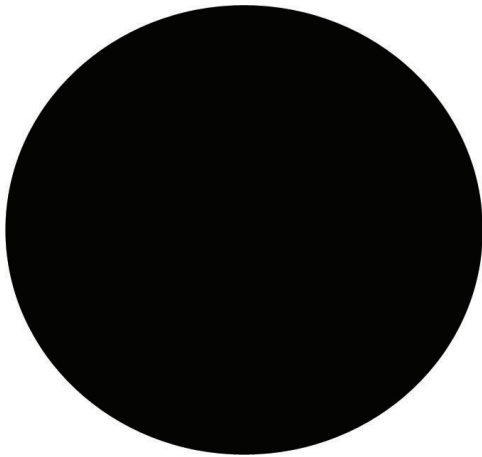

The adhesive tag complies with 15693 ISO standards for smart card technology and operates at 13.56 MHz. It works with the R10, R40, and RK40 iCLASS Readers. The tag is Wiegand 26-bit and 2K (256 Byte) with two application areas. The tag is black plastic with adhesive backing that attaches to non-metallic surfaces. It is programmed and has inkjet matching numbers. Each package contains ten tags.

Ordering Information

iCLASS 2K Wiegand Adhesive Tag (26-bit)

ACA-IC2K26-10

A contactless adhesive tag with smart card technology programmed to Wiegand 26-bit format. It operates at 13.56 MHz. It is 2K (256 Byte) with two application areas. Each package contains ten tags.

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by