

LBD3903-D Cabinet loudspeaker 12W, black



The LBD3903-D is a 12W, general-purpose, cost effective loudspeaker for indoor use. Keyholes at the rear are provided for quick and easy wall mounting. The angled front baffle results in a better sound in the listening area.

Functions

The robust, solid MDF (Medium Density Fiber board) enclosures are covered with a durable, easy-to-clean black vinyl. The ABS fronts are covered with fine woven cloth in matching color.

The loudspeaker has been tested for operation at rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards.

Installation/configuration notes

Three keyholes in the rear panel provide easy and quick wall mounting.

A convenient, easy-to-use, 4-pole push-in terminal block is on the rear panel for on-site wiring.

This terminal block has provision for power tapping on the 100-volt, matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter power radiation (in 3 dB steps).

- ▶ Good speech intelligibility and background music reproduction
- ▶ MDF construction

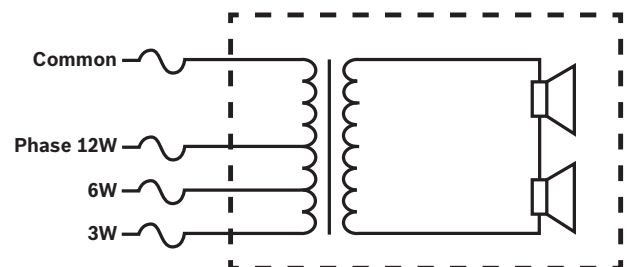


Fig. 2: Circuit diagram

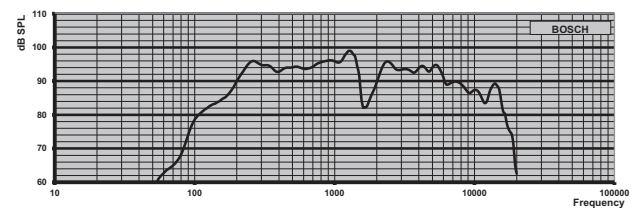


Fig. 3: Frequency response

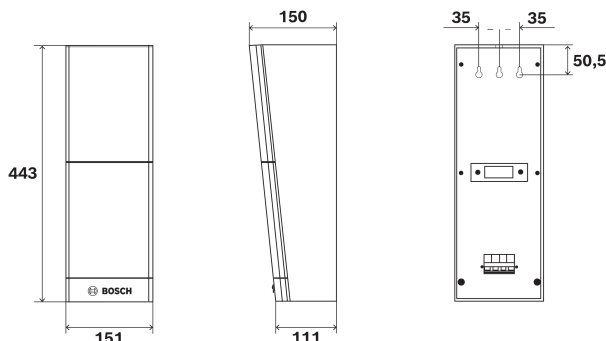


Fig. 1: Dimensions in mm

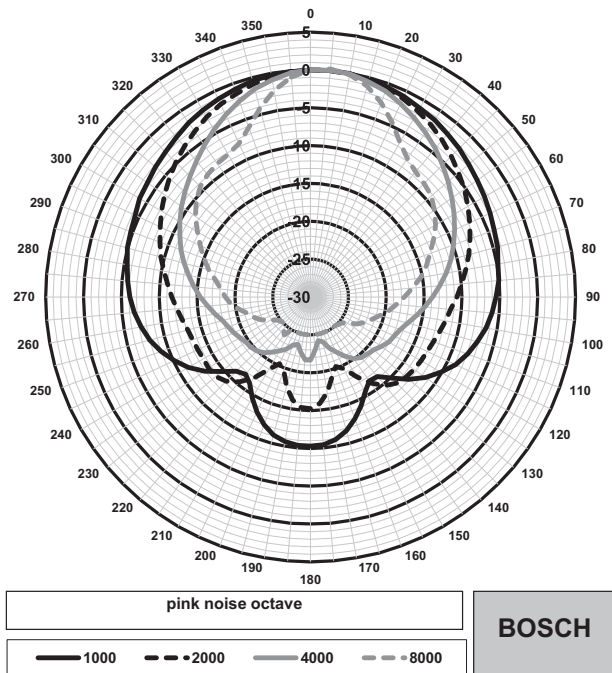


Fig. 4: Normalized horizontal polar plot

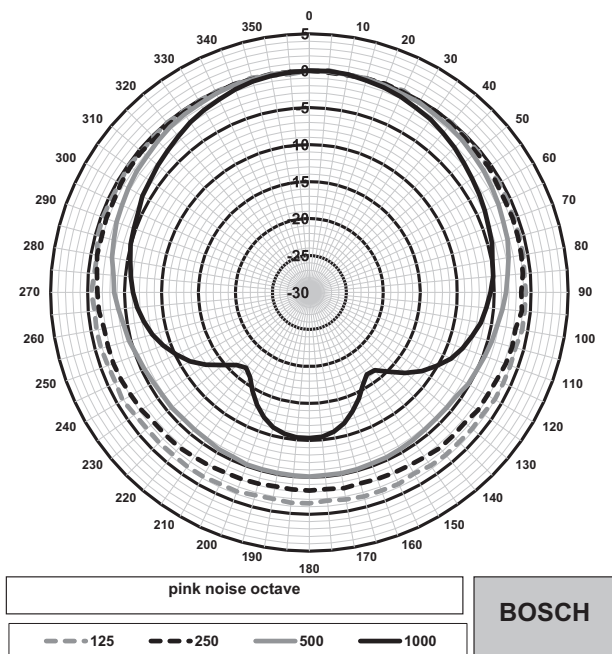


Fig. 5: Normalized horizontal polar plot

Octave band sensitivity*

	Octave SPL 1W/1m	Total octave SPL 1W/1m	Total octave SPL Pmax/1m
125 Hz	82.1	-	-
250 Hz	94.9	-	-
500 Hz	93.6	-	-
1000 Hz	97.7	-	-

2000 Hz	93.5	-	-
4000 Hz	94.2	-	-
8000 Hz	90.6	-	-
A-weighted	-	91.7	102.0
Lin-weighted	-	92.5	102.9

(1/1)th octave band sensitivity

Octave band opening angles

	Horizontal	Vertical
125 Hz	360	360
250 Hz	360	360
500 Hz	360	126
1000 Hz	184	66
2000 Hz	112	88
4000 Hz	86	58
8000 Hz	49	44

Acoustical performance specified per octave (all measurements are done with a pink noise signal; the values are in dB SPL).*

Parts included

Quantity	Component
1	LBD3903-D Cabinet loudspeaker 12W, black

Technical specifications

Electrical

Rated power	12 W (12 W / 6 W / 3 W)
Maximum power	18 W
Sound pressure level at 12 W / 1 W (1 kHz, 1 m)	102.0 dB / 91.7 dB (SPL)
Effective frequency range	150 Hz to 15 kHz
Opening angle horizontal at 1kHz / 4kHz (-6dB)	184° / 86°
Opening angle vertical at 1kHz / 4kHz (-6dB)	66° / 58°
Rated impedance	833 ohm
Rated input voltage	100 V
Connector	4-pole push-in terminal

Mechanical

Dimensions (H x W x D)	445 mm x 151 mm x 150 mm / 111 mm
Weight	2.6 kg
Color	Black

Environmental

Operating temperature	-5 °C to +55 °C
Storage temperature	-40 °C to +70 °C

Ordering information**LBD3903-D Cabinet loudspeaker 12W, black**

Cabinet loudspeaker 12 W, MDF enclosure, finished in black,
with keyholes for wall mounting.

Order number **LBD3903-D | F.01U.294.065**



<https://www.keenfinity-group.com>