

# Solution 6000-IP Product Matrix



**BOSCH**

Invented for life

Any one of the IP modules shown on the right can be installed. IP via Wi-Fi is available when the Wi-Fi enabled keypad is used.

P/N - CM747B  
Plug On 4G/3G  
GSM/GPRS Module



OR

P/N - CM369B  
IP Communications Module  
4G/3G GPRS/Ethernet



OR

P/N - CM751B  
Plug On Ethernet  
IP Module



x1



P/N - CC615PB  
Solution 6000-IP  
Security Controller PCB

Panel supports direct  
RFRC-STR2 serial  
connection

RFRC-STR2

RFRC-STR2 RADION  
Wireless Receiver -  
Streamline Bus



x1

RFRP2 Wireless transceiver- Repeater  
**Note: Repeater is not compatible with  
2 Way SMART RF**



P/N - SW500B  
Solutionlink  
Upload/Download  
Software (V2.30 or higher)




P/N - SW501B  
Site Manager  
Onsite Administration Software  
(IP Ethernet Connectivity Required)

P/N - CM710B  
4 Way LAN Relay  
Output Expander  
Module




x8

P/N - CM720B  
1Amp LAN Power  
Supply & Battery  
Charger Module



x8

P/N - CM760B  
Real Time Clock  
Module



x1

P/N - RF120  
SMART RF LAN Base  
Station Receiver 2-Way



x4

P/N - RF110  
SMART RF - 5 Button  
2-Way Keyfob



P/N - HCT-4UL  
4 Button Premium  
Keyfob



P/N - RF110FK  
Colour Fascia Kit To  
Suit RF110 Keyfobs



iFob Control



SMS Control

## SMART DEVICE APPS

Smart device apps are available to enhance alarm reporting and provide real time control of system areas, outputs and doors etc. More information can be found in the app stores, or on the MyAlarm web site at [www.myalarm.com.au](http://www.myalarm.com.au).



**MyAlarm**

Up to 16 keypad devices of any type can be installed on the Solution 6000 panel. This includes Keypads, Readers and Weigand to LAN Interfaces.

## SMART CARD CREDENTIALS AND LAN READERS

P/N - PR365  
Adhesive Smart Card Sticker




P/N - PR301  
Smart Card Token with Keyring



P/N - PR370  
Dual Smart Card and  
EM Format Token



P/N - PR350  
ISO Smart Card



External  
Smart Card Reader  
P/N - PR116B White  
P/N - PR115B Black



Internal  
Smart Card Reader  
P/N - PR114B White  
P/N - PR113B Black



3.5" Colour Keypad with  
Internal Smart Card Reader  
P/N - CP736B



P/N - CP156B  
Slim Style External  
Metal Keypad with S/C Reader



P/N - CP155B  
External Keypad  
with S/C Reader



3.5" Colour Keypad  
With S/C + Wi-Fi  
+ Tamper  
P/N - CP737B



WiFi

**SMARTRF**



[bit.ly/SmartRF](http://bit.ly/SmartRF)

# Solution 6000-IP Product Matrix




Invented for life



P/N - CP799B  
Service Keypad  
Installer Tool

P/N - CM797B  
LAN Isolator Module



Up to 8 LAN Isolator modules can be connected. Isolators provide electrical isolation between LAN segments reducing the chance of surge damage. Isolators can also be used to increase the total LAN length beyond 1200m.



P/N - CM704B  
8/16 LAN Zone Expander



Up to 8 zone expanders of any type can be connected to the system. When using Single or Alarm & Tamper EOL, the CM707B can be installed to provide 16 zones on the CM705B Expander. The CM707B cannot be installed when using split EOL monitoring.


Max panel zone count configuration is:  
Single EOL = 136  
Alarm & Tamper = 136  
Split EOL = 144

P/N - CM707B  
8 Zone Piggy  
Back Expander

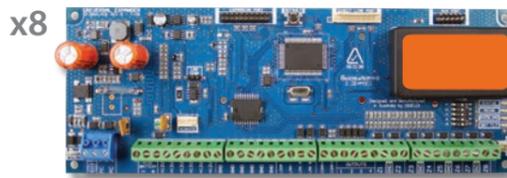

P/N - CM705PB  
8/16 Universal LAN Zone  
Expander PWA Only


P/N - CM796B  
Wiegand to DF RS485  
LAN Interface Module




P/N - CM430S  
LAN to Ethernet  
Converter Module



P/N - CM435B  
Power Terminal  
Expander Module



P/N - CM444B-10PC  
Slim Style Relay  
Card Form C-2 Amp  
10pcs



P/N - CM940B  
6 Way Programmable Relay Card.  
Can be separated into single relay cards.



P/N - CM255B  
Panel Default Unlock Key  
Will reset Installer PIN and  
RAS PIN on Solution 6000  
panels.



P/N - CM436B  
Desktop Reader Interface For 3rd  
party Wiegand Readers.  
No Reader supplied.

P/N - CM438B  
USB powered Desktop Reader  
Interface for DF format EM Prox  
tokens.

P/N - CM439B  
USB powered Desktop Reader  
Interface for DF MiFare Smart Card  
tokens.

Desktop readers are for use with Solutionlink and Site Manager Software packages and allow user credentials to be learnt at the PC.

- = Encrypted RS485 LAN
- = ISOLATED Encrypted RS485 LAN
- = Programmable Serial Input
- = TCP/IP Network Link
- = Encrypted RS485 LAN 2

Wiegand to LAN Interface can support 3rd party readers up to 40 bits.



The CM723B and CM724B can be easily installed inside the CM350, MW720B and MW730B enclosures.



P/N - CM723B  
LAN 5 Amp P/S Module  
With Dual Battery Chargers



P/N - CM724B  
LAN 5 Amp P/S Module With Dual  
Battery Chargers (Export Model)

Some features and modules types may require panel and or module firmware updates to operate. Please see individual product documentation for minimum requirements.

