


NDA-U-PMALC Pole mount bracket

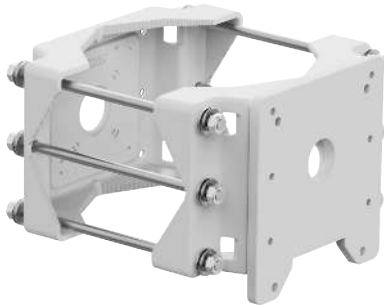

The NDA-U-PMALC is a pole mount accessory to mount FLEXIDOME multi+ 7100i, FLEXIDOME multi+ 7100i IR cameras. The heavy-duty pole mount adapter is built to withstand high-load environmental conditions by utilizing a rigid, dual-plate mechanical framework.

Functions

Pole mount bracket

This pole mount bracket enables installation on a pole or mast.

Universal accessory combinations

It provides a safe and robust solution to mount cameras together with the following accessories.


- NDA-U-PA0/1/2 Surveillance cabinet;
- NDA-PEND-WPLATE Mounting plate for NDA-7100-PEN/PENF;
- NDA-U-PSUxH PSU, IR Power Supply unit.

Regulatory information

Environmental	
Salt mist	NEMA 4X
Vibration	IEC60068-2-6:2008
Impact	IK10

- Pole mount adapter suitable for installation of accessories such as surveillance cabinets on a pole or mast
- Modular design for fast and easy installation
- Weather resistant finish to maintain cosmetic appearance

Installation/configuration notes

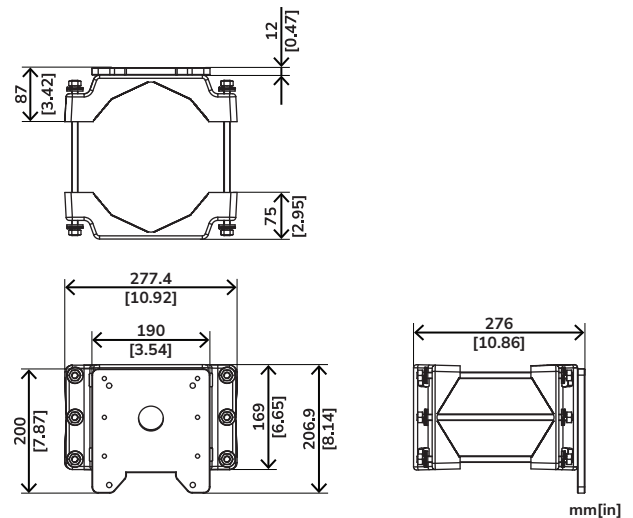

Dimensions in mm (inch)

Parts included

Quantity	Component
1	Pole mount bracket
1	Adapter plate (pre-installed)
4	M10x20mm socket head screws
4	M10x40mm socket head screws
4	M10 washers
6	M10 - Threaded rod

Quantity	Component
12	M10 -Spring Washer
12	M10 -Washer
12	M10 -Threaded hex nuts

Technical specifications

Mechanical

	Pole Mount Bracket
Dimensions (Front)	Height: 206.9mm (8.14 in) Width: 277.4mm (10.92 in) Depth: 87 mm (3.4 in)
Dimensions (Back)	Height: 169 mm (6.65 in) Width: 277 mm (10.9 in) Depth: 75 mm (2.9 in)
Weight	3.4 kg (7.5 lb)
Max load	50 kg (110 lb)
Color (RAL)	RAL 9003 Signal white
Material	Aluminum alloy

Ordering information

NDA-U-PMALC Pole mount bracket

Pole mount bracket for FLEXIDOME multi+ 7100i and FLEXIDOME multi+ 7100i IR
Order number **NDA-U-PMALC**

Accessories

NDA-PEND-WPLATE Mounting plate for NDA-7100-PEN/PENF

Mounting plate for NDA-7100-PEN and NDA-7100-PENF for AUTODOME 7100i and AUTODOME 7100i IR cameras
Order number **NDA-PEND-WPLATE**

NDA-U-PA0 Surveillance cabinet 24VAC

Surveillance cabinet, 24 VAC input, 24 VAC output
Order number **NDA-U-PA0**

NDA-U-PA1 Surveillance cabinet 120VAC

Surveillance cabinet, 100 - 120 VAC 50/60 Hz input, 24 VAC output
Order number **NDA-U-PA1**

NDA-U-PA2 Surveillance cabinet 230VAC

Surveillance cabinet, 230 VAC input, 24 VAC output
Order number **NDA-U-PA2**

NDA-U-PSU0H PSU, IR, 24VAC

Power supply unit without transformer, 24 VAC, IK10, for AUTODOME 7100i IR cameras
Order number **NDA-U-PSU0H**

NDA-U-PSU1H PSU, IR, 120VAC

Power supply unit, 120 VAC, IK10, for AUTODOME 7100i / -IR and AUTODOME 7100s / -IR cameras
Order number **NDA-U-PSU1H**

NDA-U-PSU2H PSU, IR, 230VAC

Power supply unit, 230 VAC, IK10, for AUTODOME 7100i / -IR and AUTODOME 7100s / -IR cameras
Order number **NDA-U-PSU2H**