
CSP-A00928 Microphone double flex 40cm stem

DICENTIS



- Unidirectional microphone
- Built-in plop and windshield
- Low susceptible for mobile phones
- Two flexible parts for optimum adjustability

The innovative, stylish and ergonomically designed microphone with an adjustable stem has a unidirectional response for optimum performance, even in noisy conditions or acoustically challenging rooms. It has low susceptibility to interference from mobile phones.

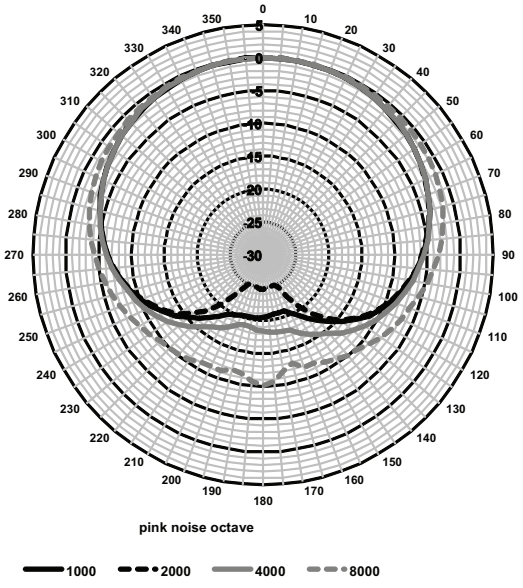

Functions

General

- The two flexible parts at the top and bottom of the stem offer greater freedom of adjustment than our standard stem microphones.

Controls and indicators

- Red or green illuminator. Red indicates microphone active, green indicates request for speech accepted.

Interconnections

- Connector to plug and fasten the microphone.

Installation/configuration notes

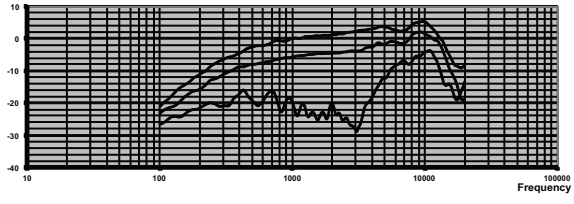


Fig. 1: Frequency response (Opening angle: 0.90 and 180 degrees)

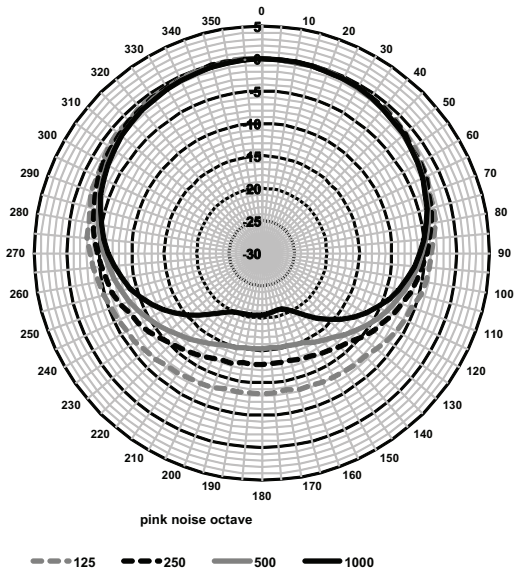


Fig. 2: Polar diagram (measured with pink noise)

Parts included

Quantity	Component
1	CSP-A00928 Microphone double flex 40cm


Technical specifications

Electrical

Power supply (VDC)	5 VDC
Power consumption (W)	0.1 W
Bandwidth (Hz)	125 Hz - 15000 Hz
Dynamic range (dB)	>100 dB
Nominal acoustic input level (dB SPL)	85 dB SPL
Maximum acoustic input level (dB SPL)	115 dB SPL
Equivalent noise (dB SPL)	15 dB SPL

Mechanical

Mounting	Plug and fasten into DICENTIS and DICENTIS Wireless devices
Microphone stem length (mm) (without connector)	400 mm
Microphone stem length (in) (without connector)	15.75 in
Connector (mm)	77.15 mm x 60.47 mm
Connector (in)	3.40 in x 2.38 in

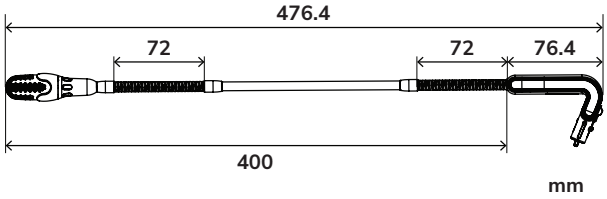

Weight (g)	140 g
Weight (lb)	0.31 lb
Color (RAL)	RAL 9017 Traffic black RAL 9022 Pearl light grey

Environmental

Operating temperature (°C)	0 °C – 45 °C
Operating temperature (°F)	32 °F – 113 °F
Storage temperature (°C)	-20 °C – 70 °C
Storage temperature (°F)	-4 °F – 158 °F
Transportation temperature (°C)	-20 °C – 70 °C
Transportation temperature (°F)	-4 °F – 158 °F
Operating relative humidity, non-condensing (%)	5% – 95%

Ordering information

CSP-A00928 Microphone double flex 40cm stem
DICENTIS double flex 40cm stem microphone for the DICENTIS Conference System or DICENTIS Wireless Conference System.
Order number **CSP-A00928 | Z.01X.011.050**

https://www.keenfinity-group.com

© Electro Voice Dynacord 2026